


Brackets, Mounts & Hardware

Insulator brackets for overhead line:
Configuration Drawings

Triangular Framing Assembly 35kV Raptor Clearance

Tri-Frame brackets reduce installation time and crossarm replacement. They are available in 15 kV - 69 kV versions with either standard clearances or raptor protection clearances. They are available either with or without insulators.

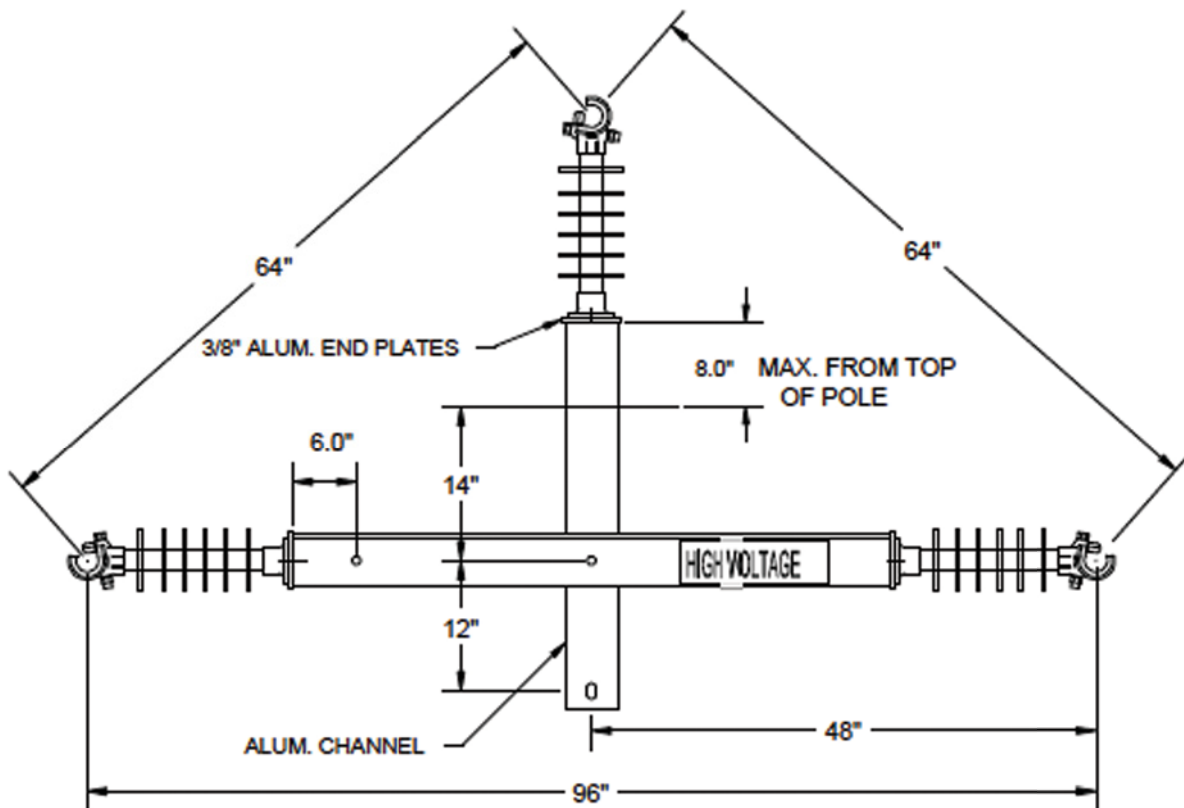

3/4"X 1-3/4" GRADE 5 HEX BOLTS AND LOCK WASHERS SUPPLIED
WITH 34.5 KV TINNED UNIVERSAL CLAMP TYPE SILICONE INSULATORS.

TORQUE INSULATOR MOUNTING BOLTS TO 65-75 FT. LBS.

This drawing is for illustrative purposes only and therefore; may, or may not reflect the current revision of this drawing. Please request the current revision from the factory.